

**SL 266**

PRODUCT SPECIFICATION SHEET

# DOUBLE BEAM UV-VIS SPECTROPHOTOMETER



Double Beam UV-VIS Spectrophotometer

# SL 266



Double Beam



Touchscreen



Cuvette



PC

7" High Resolution Touch Screen LCD Color Graphical Display with Built in PC .

Supports USB-Pen Drive to Store/Retrieve Mass Spectral Data.

Smallest form factor Double Beam Spectrophotometer.

## SALIENT FEATURES

- Variable Bandwidth - 1 nm
- Automatic wavelength calibration and programmable wavelength for lamp change over.
- Lamp selection enables conserving the life of the lamps.
- Built in Windows® Based PC Control.
- Stand alone unit offers an advanced technology with data processing features for Scanning, Discrete Wavelength, Concentration determination by standards and  $\epsilon$ -factor method, Time scan with minimum time interval of 1.0 sec, Auto-zero facility, Self check and Self diagnostic modes.
- Data in the form of graph and table can be printed directly on to a printer.
- Built in advanced Data Processing capabilities like 4<sup>th</sup> order Derivate Spectra, Overlay of maximum ten Spectra, Peak Picking Facilities, % Concentration mode, Auto Zero Facility, Spectra Zooming, Smoothing, Data Saving, Retrieval and Printing.
- Supports USB printing with PCL 5e class printers.
- Networking Connectivity through TCP/IP Interface.



Chemical



Agriculture



Pharmaceutical



MicroNutrients



Soil



Pesticide



Academic



Metals



Fertilizer



Cement



Dyes



Food & Beverages



Glass



Mines & Geology

## APPLICATIONS

- For any Spectrophotometric or Colorimetric measurement where applications require very high-resolution bandwidth and cGLP compliance is mandatory.
- Enzyme Kinetics.
- Organic compounds in Biological matter.
- Glucose, Fructose, Carbohydrates, Proteins etc., in Foods.
- Edible Dyes, Alcohols etc., in Beverages.
- Purity of constituents in Pharmaceuticals.
- Toxic elements like Cadmium, Lead, Arsenic and Mercury etc., in Effluents.
- Constituents in compositions used in Metallurgy, Fertilizer, Pesticide, Chemical, Petrochemical, Steel, Cement, Glass & Other Industries.
- Micronutrients like N, P, K, S, Ca, Mg, Zn, Cu, B, Mo, etc., in Agricultural soil, Plants etc.
- Life Science Applications.

## SPECIFICATIONS

### SPECTRAL

Range	190 to 1100 nm
Bandwidth	1 nm
Readability	0.1 nm
Accuracy	± 0.3 nm
Repeatability	± 0.2 nm

### LIGHT SOURCE

Deuterium Lamp (D<sub>2</sub>) & Tungsten (W) Halogen Lamp

### STORAGE

1 GB

### DETECTOR

Silicon Photo Diode

### DATA PRESENTATION

Display	7" ( 800 x 480) High resolution graphical display
---------	---

### DATA PROCESSING

Spectrum, Concentration, Concentration by  $\epsilon$  -Factor, Enzyme Kinetics, Overlay, Time Scan, Discrete Wavelength, Ratiometric, Peak Picking, Spectra Zooming, Smoothing, Data Saving & Retrieval, Auto Zero facility and Printing.

### PHYSICAL DIMENSIONS

Size (WxDxH) in mm	500 x 375 x 230
Weight (in kg)	Approx. 15

### POWER REQUIREMENT

90-260 V AC, 50-60 Hz, 1 $\phi$ , 170 VA Max.

### PHOTOMETRIC

System	Double beam optics	
Range	± 3 Abs	
Accuracy	± 0.002 Abs at 1.0 Abs	
	± 0.010 Abs at 1.5 Abs	
Repeatability	± 0.002 Abs at 1.0 Abs	
Stability (Baseline)	± 0.003 Abs/hr. after warm up	
Stray Light	<0.05% T at 220 nm with NaI 10g/L	
Readability	%T	0.01
	Abs	0.0001

### MONOCHROMATOR

Concave holographic grating with 1200 lines/mm

### CONTROL

Built-in Windows Based PC Control

### PORTS

3 USB Ports - Can be used for Printer, Keyboard, Pen Drive and Mouse

TCP/IP Port - Network Connectivity


PC Port - PC Connectivity

### SAMPLE ATTACHMENT


Standard	Fixed 10mm path length Holders for Reference and Sample.
Optional	Fixed multi path cuvette holders for Reference and Sample accommodating 10mm to 100 mm cuvettes.
	Fixed cuvette holder for Reference and 6 Position motorized 10 mm path cell holder for Sample.
	Fixed cuvette holder to accommodate micro cuvettes.

### ACCESSORIES SUPPLIED

With Instrument	10 mm Path length Cuvettes, Spectratreats® Software
At extra Cost	PC Software, Multi Path length Cuvette holder, 10 mm, 20 mm, 40 mm, 50 mm and 100 mm Path length Cuvettes, Micro Cuvettes, USB Pen Drive and Printer

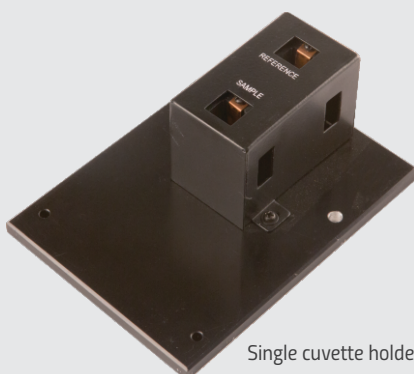

Single cuvette holder (standard)

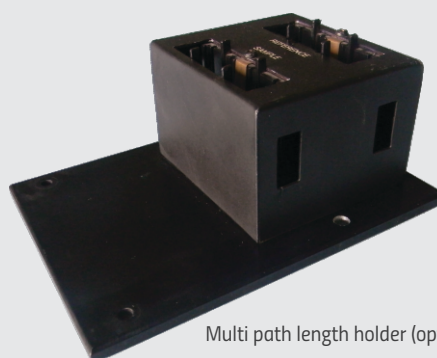

Multi path length holder (optional)



6 cuvettes holder (optional)

Celebrating 60 years  
of our Journey



[www.elico.co/60years](http://www.elico.co/60years)



[www.elico.co](http://www.elico.co)

**ELICO**<sup>®</sup>

An ISO 9001:2018 | 14001 | 27001 Certified Company

B-90, A.P.I.E., Sanathnagar, Hyderabad 500 018, Telangana., India

Tel +91 40 44451234 Fax +91 40 23771639 [info@elico.co](mailto:info@elico.co)

**Ahmedabad**

[ahm@elico.co](mailto:ahm@elico.co)  
+91 98241 75321

**Bengaluru**

[blr@elico.co](mailto:blr@elico.co)  
+91 99000 28741

**Bhopal**

[bpl@elico.co](mailto:bpl@elico.co)  
+91 99930 96876

**Bhubanewswar**

[bbr@elico.co](mailto:bbr@elico.co)  
+91 99371 12105

**Chennai**

[chn@elico.co](mailto:chn@elico.co)  
+91 98402 65797

**Cochin**

[kel@elico.co](mailto:kel@elico.co)  
+91 81291 84400

**Delhi**

[del@elico.co](mailto:del@elico.co)  
+91 98710 06104

**Guwahati**

[gau@elico.co](mailto:gau@elico.co)  
+91 91211 77451

**Hyderabad**

[hyd@elico.co](mailto:hyd@elico.co)  
+91 99896 25457

**Kolkata**

[kol@elico.co](mailto:kol@elico.co)  
+91 91211 77452

**Lucknow**

[lku@elico.co](mailto:lku@elico.co)  
+91 91980 01666

**Mumbai**

[mum@elico.co](mailto:mum@elico.co)  
+91 77100 96111

**Patna**

[pat@elico.co](mailto:pat@elico.co)  
+91 91211 77450

**Visakhapatnam**

[vtz@elico.co](mailto:vtz@elico.co)  
+91 99899 94532

